


H10, H12 & 10T Seat

Step 1 – Choose one of the seat position slots.

Step 2 – Engage the side washer seat guide into the seat slot. Ensure the washer engagement is underneath the looped bungee.

Step 3 – Engage the opposite side seat guide into the seat slot. Ensure the washer engagement is underneath the looped bungee.

Step 4 – Apply pressure and tighten the tension lock against the seat engagement slot until the seat is firmly held in place.

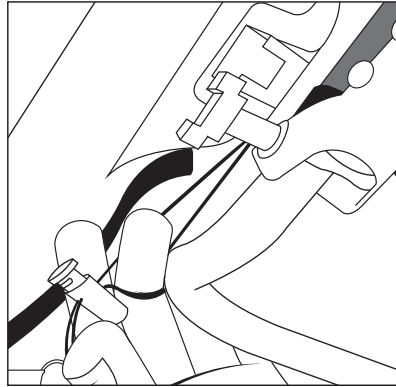


FS10 Seat

Step 1 – Confirm the nylon rail guide is underneath loop, as pictured, on each side.

Step 2 – Engage the nylon rail guide into rail.

Step 3 – Apply pressure and tighten the tension lock against the seat rail mounts until the seat is firmly held in place.

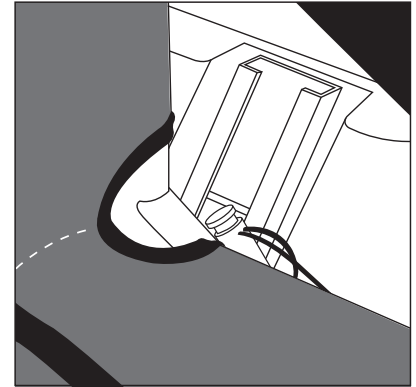

12T SEATING SYSTEM

The 12T seating system comes fully assembled and ready to install into the rail guides, as shown below. Please follow the step-by-step overview:

Step 1 – Confirm alignment of guides with rails.

Step 2 – Engage the first guide halfway into the rail.

Step 3 – Engage the final guide into the rail while applying downward pressure.

Step 4 – Slide the seat to the desired molded landing for maximum comfort and performance on the water.

